
ISUZU

P 75 CREW

190 hp Série Bleu OBD-D (7,5 ton)

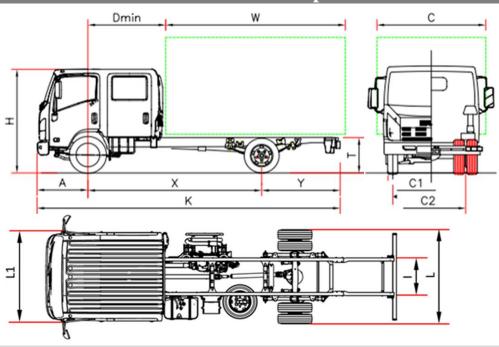

€ 45.660 VAT excluded					
P 75		P 75 H	P 75 M	P 75 Q	
Wheelbase	Х	3365 ⁽⁵⁾	4475	5300 ⁽⁵⁾	
Overall length	K	6040	7870	9282	
Body lenght min. (1)	W	3230	5060	6472	
Body lenght Max. (1)	W	3684	5375	6840	
Rear overhang	Υ	1565	2285	2872	
Chassis height	Т	800			
Overall height	Н	2280			
Rear axle width	L	2115			
Cab width ⁽²⁾	L1	2040			
Body width ⁽³⁾	С	2345			
Front axle to back of cab	D min	1700			
Front overhang	А	1110			
Frame internal size	I	850			
Front track	C1	1680			
Rear track	C2	1650			
Minimum Road Clearance	-	210			
Turning diameter (m) (4)	-	12,6	16,3	19,0	
WEIGHT (kg)					
Unladen weight ⁽⁶⁾		3235	3265	3365	
Unladen weight front axle		2185/1050	2200/1065	2250/1115	
Gross Vehicle Weight (GVW)		7500			
Front/rear total weight		3100 / 5800			
Max trailer weight unbraked/Max trailer weight		750 / 3500			

- The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications).
 Excluding turn signal and side mirrors
 Possible widths with optional mirror brackets 2115/2170 2170/2345 2345/2500
 Curb to curb turning diameter

 Wheelings are referred to the profit of the p

braked

- Wheelbase modified (see thw optional equipment)
 The Unladen weight include spare wheel, full fuel tank and driver, optional excluded. NEES +35 Kg (25/10)

P 75 CREW - Wheelbase (mm) H 3365 - M 4475 - Q 5300

FEBRUARY 2021		€ 45.660 ^(**)		
Equipment	NEES 2 + Cruise control	€ 1290 ^(**)		
		(**)VAT excluded		
Standard features				
 EGR - DPD - SCR MID display Engine exhaust brake Side mirrors heated and electric 	 Immobilizer Central locking with remote control Power operated windows Speed limiter (90km/h) Fog lamps Fr and Rr 	 Head lamps control levelling Day-time running lights Radio DAB+ with USB Steering adjustable (tilting and height) 		
	Air conditioning	€ 1089 (**)		
Optional	Wheelbase modified	Ask to your dealer		
	. Body builder Controller	€ 354 (**)		
Engine	ISUZU 4HK1E6C Diesel Engine 4 cylinders. Intercooler, common-rail with direct injection Variable-geometry turbocharger DISPLACEMENT 5193 cm³ POWER 140kW (190 hp) 2600 rpm TORQUE 510 Nm 1600 – 2800 rpm EMISSIONS REGULATIONS EURO VI OBD-D.			
Safety systems	ABS ESC (Electronic Stability Control) with LDWS AEBS SRS 2 Airbag (Driver/Pass.)	th ASR		
Tank	90 L	16 L Ad-Blue®		
Gearbox and Final drive ratio	6 gear MZZ6F 6.369 - 3.767 - 1.966 - 1.355 - 1.000 - 0.782; Reverse 6.369; Final gear ratio 4.100 (41/10)			
Transmission control	Manual	NEES 2		
Dimensions of the chassis	Width 70 mm, Height 216 mm, Thickness 6 mm			
Number of seats	7			
Axle	2 the rear one with twin wheels.			
Tires	Front 215/75 R17,5C simple. Rear 215/75 R17,5C dual.			
Brakes	Front and rear: ventilated discs with asbestos-free linings. Hydraulic system, with vacuum brake booster EEC standards with ABS, independent circuits on both axles. Drum parking brake on the transmission shaft.			
Suspensions	Front and rear: Multi semi elliptical alloy steel leaf spring. Hydraulic double acting shock absorbers.			
Electric system	Nominal voltage 24V - Generator 90A - 2 x Battery 70Ah			